
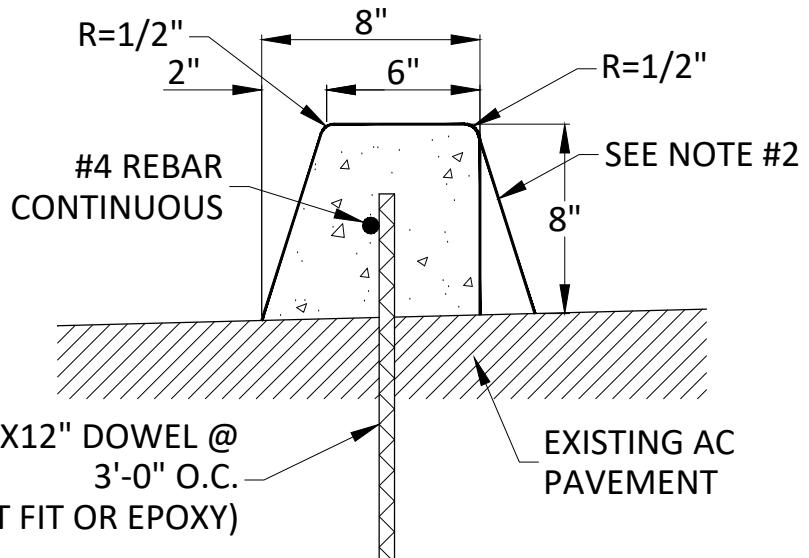



SECTION A-A

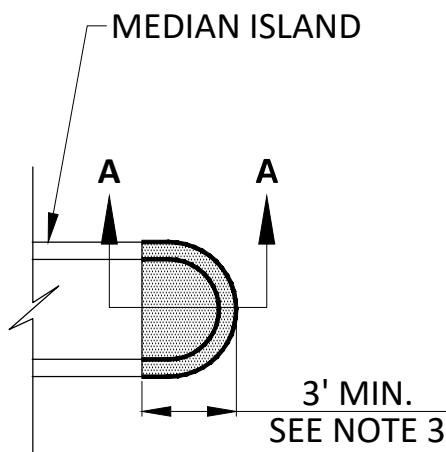

NOTE: DELETE #4 BAR & DOWEL IF CURB IS EXTRUDED. FOR EXTRUDED CURB CONSTRUCTION, EPOXY RESIN ADHESIVE SHALL BE APPLIED IN LIEU OF BAR & DOWEL REINFORCING.

TACK-ON CURB

BULL NOSE DETAIL

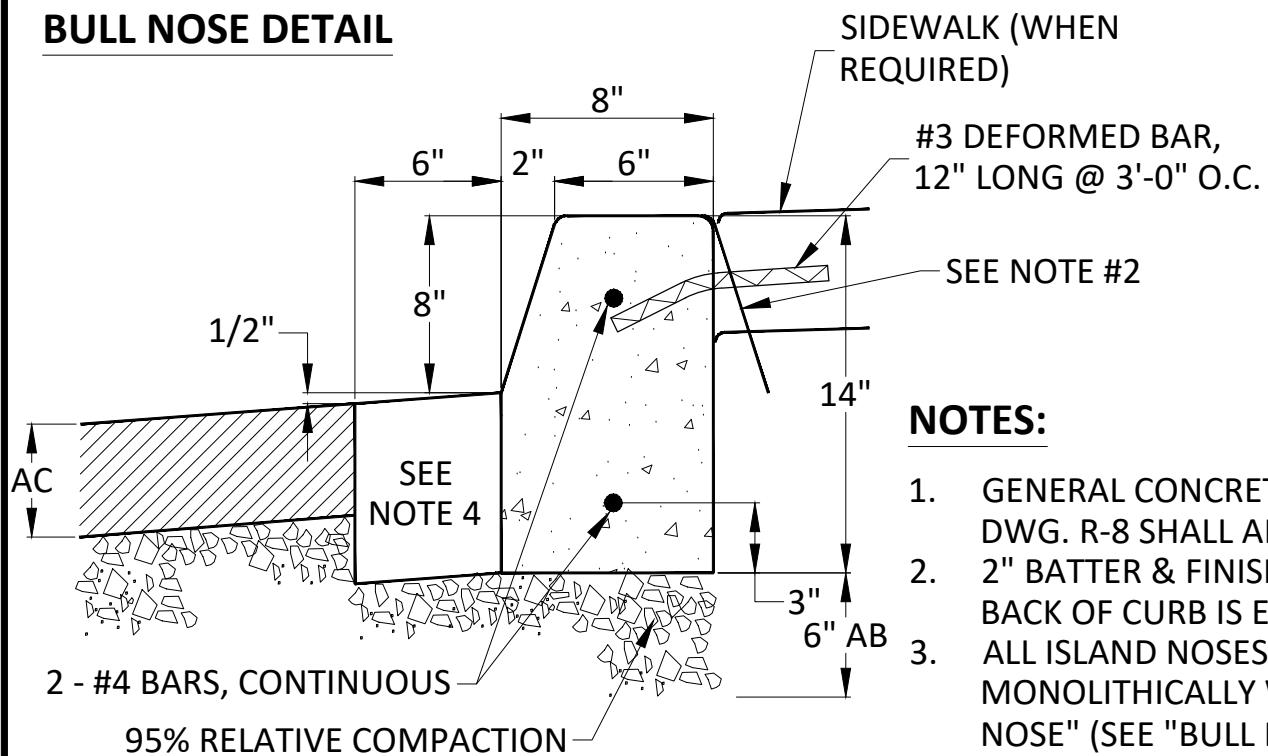

VERTICAL CURB

NOTES:

1. GENERAL CONCRETE NOTES DWG. R-8 SHALL APPLY.
2. 2" BATTER & FINISH BACKSIDE IF BACK OF CURB IS EXPOSED.
3. ALL ISLAND NOSES TO BE POURED MONOLITHICALLY WITH "BULL NOSE" (SEE "BULL NOSE" DETAIL).
4. INSTALL 6" MONOLITHIC GUTTER WITH CURB IF REQUIRED ON PLANS.

CITY OF MILLBRAE * STANDARD PLANS

NO.	REVISIONS		DATE	ISLAND CURB			APPROVED	
DRAWN	CK	CHECKED	NT				City Engineer	
				DATE 03/2024	SCALE	NTS	DWG. NO.	R-5